

REDUCED CATCHBASIN LEAD DETAIL

LEAD CAPACITIES AT 1.50m TYPICAL DEPTH TO CENTROID;
DISCHARGE COEFFICIENT = 0.64

- 100mm ϕ - 0.027 m³/s
- 125mm ϕ - 0.043 m³/s
- 150mm ϕ - 0.061 m³/s



TOWN OF NEW TECUMSETH


REDUCED CATCHBASIN
LEAD DETAIL




METRIC
ALL DIMENSIONS ARE
IN METRES UNLESS
OTHERWISE SHOWN

NO.	REVISIONS	DATE	APR'D

SCALE: N.T.S.
DATE: FEB. 2011
TNT.SD.
201

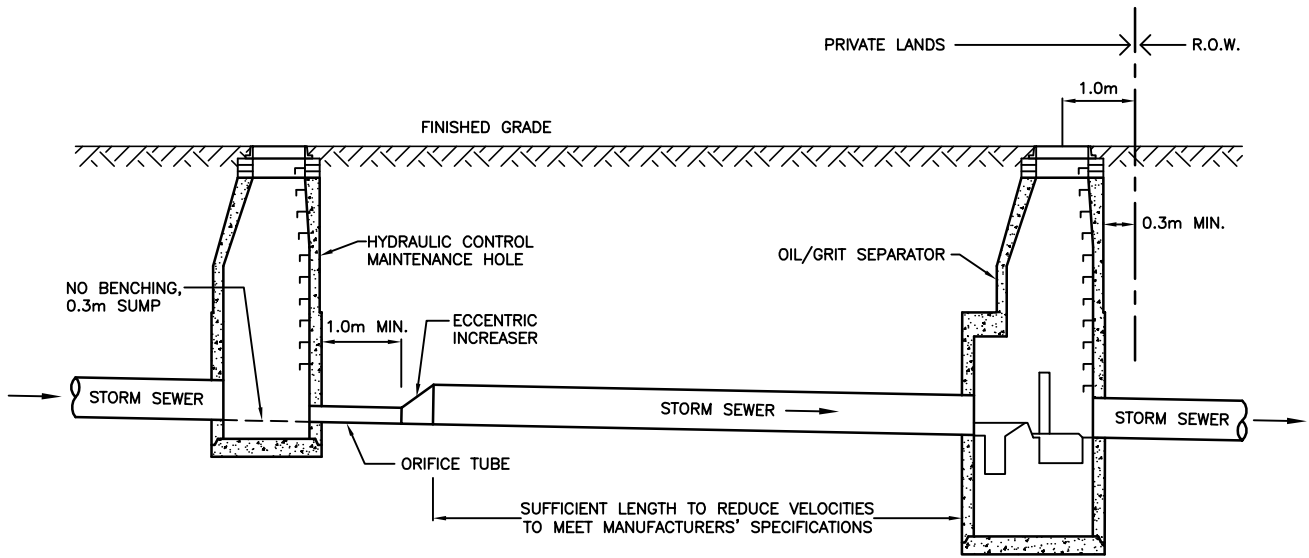

WHERE QUALITY CONTROL REQUIRED

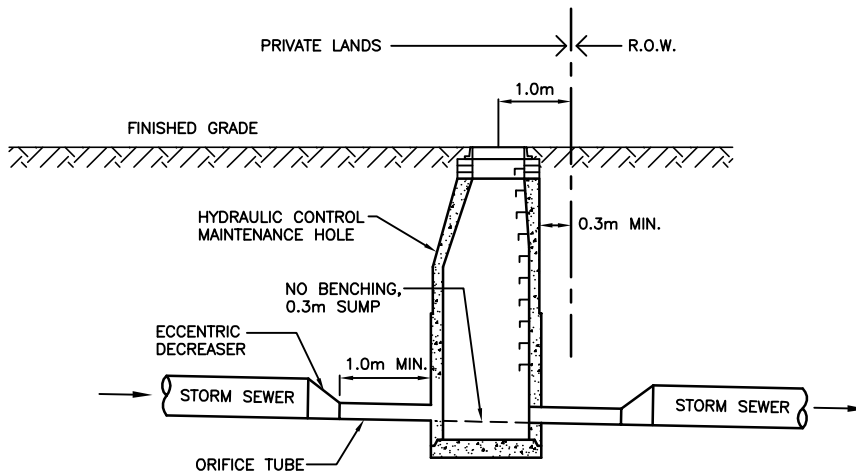

WHERE QUALITY CONTROL NOT REQUIRED



TOWN OF NEW TECUMSETH

**ON-SITE STORMWATER
MANAGEMENT CONTROL DETAIL**



METRIC
ALL DIMENSIONS ARE
IN METRES UNLESS
OTHERWISE SHOWN

NO.	REVISIONS	DATE	APR'D

SCALE: N.T.S.
DATE: FEB. 2011
TNT.SD.
202